

Our Mesh Range



Installation Guide


Installation Guidance

Our Mesh is a tough, flexible and long lasting extruded polythene mesh. Available in three grades (Light, Medium & Heavy duty) and supplied in two roll sizes (2m x 20m & 1m x 10m).

It can be effectively employed onto stable ground by simply unrolling and pinning adjacent and successive lengths using metal U-pins.

After a suitable period of time, the grass will grow through the mesh and reach a convenient height to be mown. The area quickly adopts a natural appearance with the grass plants intertwined with the mesh to provide permanent protection against wear.

Installation is best carried out during the growing season to allow a strong interlock between the mesh and the grass, although the mesh can be installed throughout the year as appropriate.

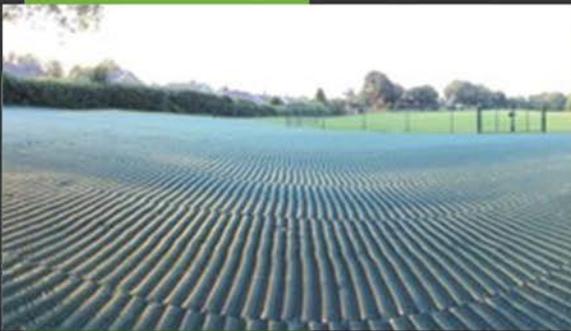

GRASSFORM GROUP

Existing Grassed Areas

1. The surface must be reasonably flat, level, firm and free-draining enough to sustain the proposed traffic. Fill shallow depressions with free-draining sandy soil. Level and consolidate. Apply seed before or after mesh installation as preferred. Alternatively, lift turf locally, fill the low area with sandy soil, consolidate and replace turf to level.
2. Prior to permanent fixing of the mesh, it is advisable to unroll it and pin loosely at each corner to allow the mesh to relax and regain its natural flatness for a minimum of 1 hour prior to permanent fixing. Ambient temperature variations will influence the time period required for the mesh to relax and lay flat.
3. Fixing Pins (50 per bag) - For the most effective pinning, of 1 single roll will require a minimum 4 bags (200 pins). Installation of 2 or more rolls will require a minimum of 3 bags (150 pins) per roll plus 1 extra bag more than the total roll quantity ordered.
4. All outer edges of mesh will require pins at 300 - 350mm maximum centres. Pins in the middle of the roll will be in 3 equally off-set rows in a chevron type pattern at 500mm apart (roll width) and at maximum 750mm centres (roll length). On multi-roll installations the edge pins will overlap and fix 2 adjacent butted edges. Pins should be inserted parallel to the mesh and flush within the structure to avoid exposure at the surface. Try to avoid inserting pins across and above the top strand of mesh. Refer to diagram for suggested pinning layout.
5. Position the mesh where required on the prepared surface. Starting from a corner of the roll and maintaining the mesh as taut and straight as possible at all times, fix the first edge (length) and then go back to the start and fix one end of the roll using the metal U-Pins (300 - 350mm centres). Do not fix both ends of both edges at this stage. Always work in the same direction along the mesh length to keep the mesh taut and to avoid ripples.
6. Working progressively along and across the mesh and away from the first pinned corner, insert 3 and more rows of pins down the centre of the roll in the chevron type layout as described (3 rows at 500mm apart & at 750mm centres down the length). Continue this until all pins are in place except for the leading edge and the roll end.
7. For 1 roll installations, fix the leading edge (length) and the final roll end (300 - 350mm centres) to complete the operation.
8. For multi-roll installations, position the next roll for fixing. Adjacent rolls must be butt jointed and no overlapped. 1 row of pins will secure the two adjacent roll edges and/or ends. Continue across the site using this method until fully installed. Additional pins may be required as determined by specific site and weather conditions and to secure any bridged or raised/tented sections of mesh where evident. Installation in cold weather conditions may benefit from fixing adjacent rolls approximately 1cm apart to allow for thermal expansion in hot weather.
9. When you are satisfied that the mesh is laid flat and fixed securely, a brushing of free-draining sandy topsoil may assist in levelling any minor low spots, but is not essential. It is not advisable to completely fill or cover the mesh with soil. A dressing of seasonal fertilised and any appropriate irrigation will encourage new grass growth to be made more rapidly through the mesh.
10. Best results are obtained by restricting trafficking until after the grass has thoroughly established through the mesh and the grass has been cut several times. This process will normally take 6 - 8 weeks during the growing season and early use will affect grass establishment. The area can be trafficked immediately if necessary, but exposed mesh may present reduced traction in wet or frosty conditions and advisory signage to this effect may be required.

Existing Grassed Areas (continued)

11. Mowing can be carried out as normal, but blades should be set higher for the first 3 - 4 cuts to enable the grass to grow through and fully intertwine with the structure.
12. After installation and establishment, warm weather conditions may cause some localised raised 'tented' mesh areas to become apparent through expansion. These localised raised areas can be further secured by placing additional U-pins as required.

Newly Sown Landscaped Areas

1. A seeded surface will require significantly longer for the grass to establish through the mesh. It can be installed directly onto newly installed turf.
2. The site must be clear of debris, reasonably flat and level, well consolidated and free-draining enough to enable it to sustain the proposed traffic.
3. Having prepared the seedbed, grass seed can be sown before or after the mesh installation. Turfed areas are prepared and installed as normal.
4. Continue steps 2 to 12 as per the **Existing Grassed Areas** guidance.

Notes

- Where weak and / or waterlogged ground conditions exist, these must be improved prior to placement of mesh. For occasional use by HGV's, a sub-base may be required.
- Advice on suitability for specific application is available from Grassform advisors.
- The mesh can become slippery when wet (before the grass has had a chance to grow through). Grassform strongly recommend that all newly installed mesh is cordoned off and signage erected to advise of any potential slip hazards.
- Expansion & contraction in hot climates: For installations where there may be broad +/- day to night temperature variations or where installations are carried out in Spring & Summer, it is recommended that a 15mm gap is left between adjacent rolls and that rolls are pinned individually.
- Manufacturing tolerances (maximum +/-) to length and width apply to the final dimensions of this product. Length +50cm, Width +5cm/-2cm. Specification Data is obtained from routine production sampling, therefore figures are nominal and may not necessarily be representative of the product supplied but will be within manufacturing tolerances.
- The mesh should be installed on a relatively flat and even surface. Any holes and dips should be filled with free-draining sandy soil. Then roll and level the ground.
- It is advised to unroll the mesh and pin at each corner and leave to settle for around 1 hour prior to installation. This will allow the plastic to regain its flat form.
- Work from one corner up the length of the roll, then work from the same corner across one width. Then work at a diagonal across the mesh whilst keeping taut to avoid any undulations.
- If installing more than one roll, make sure that you overlay the pins along the connecting edges. Do not overlap the mesh as this will create a trip hazard and the mesh will peel much easier.
- Seed and fertilise the soil before or after installation as needed.

GRASSFORM GROUP

Related Products:



GRM Pegs

Secures mesh to the ground and can be used with optional Bullseye Markers to create designated parking.



Bullseye Markers

Quickly slots on top of our GRM Pegs to create parking bay organisation without any stress!



U-Pins

Reinforced metal 'staple like' structure for a tight and secure fit on the mesh to keep a strong hold.

Characteristics

Structure:
Polymer:
Colour:
Tensile Strength [MD]:
Yield Point Elongation:
Residual Thickness @500kPa:
Slip Risk PTV Value (average):

Medium Duty Mesh

Oscillated
High Density Polyethylene
Green
12
30
45
>40 (low)

Heavy Duty Mesh

Oscillated
High Density Polyethylene
Green
16
35
60
>40 (low)

Nominal Dimensions

Width (m):
Length (m):
Thickness (mm):
Weight/m² (kg):
Weight/linear metre (kg):
Roll Weight (kg):

1 or 2
10 or 20
11
1.2
1.2 or 2.4
12 or 48

1 or 2
10 or 20
14.5
2
2 or 4
20 or 80